

A CLEARER VISION FOR THE PERFECT FINISH

# Triton


fully automated thermal laminator

The BI+ Triton is available either single or double sided and also available in either 760mm or 1050mm widths. PLC controlled with touch screen operation, its features make it equally adept at running both digital and lithographic output.

Triton DS - Double Sided




Triton - Single Sided

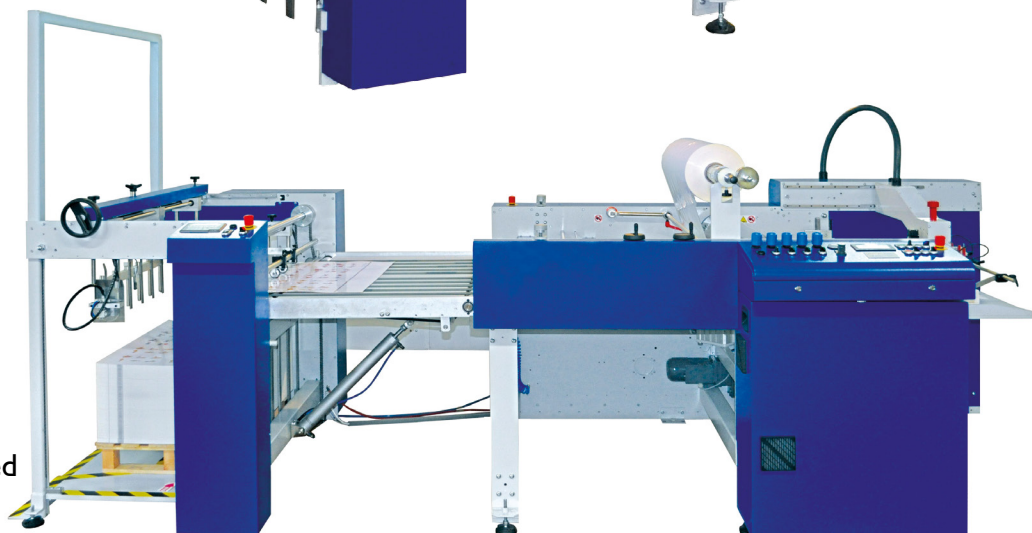


A CLEARER VISION FOR THE PERFECT FINISH

# Triton


fully automated thermal laminator




The pallet loading suction feeder offers a deep pile for longer runs and is easily adjustable for a variety of different sheet sizes.

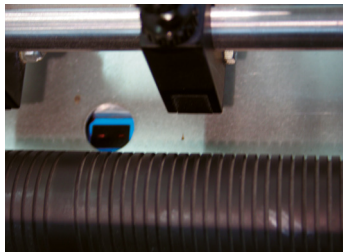

An pneumatically controlled infeed roller presents lightweight and digital output to the laminating and nip rollers where a no sheet detector helps to prevent unwanted wraparounds.

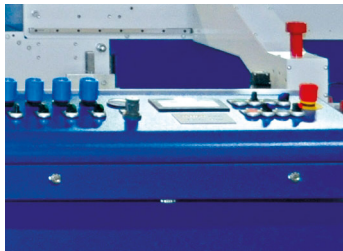


The PLC control panel offers ease of operation and is enhanced with a modem link for remote diagnostics.

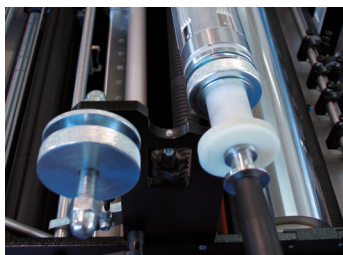


The film mandrel swings out and incorporates an air shaft to speed roll changes.

Film can be adjusted laterally on the run to minimise waste and down time.

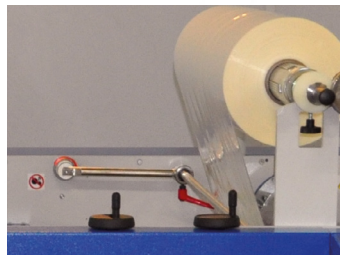

The decurl bar is adjustable to assist in giving a flat result.

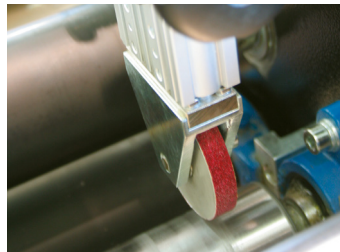

The positioning of the pneumatically controlled perforator overcomes any potential issues caused by poor film roll profiles allowing higher speeds to be maintained.



The adjustable burster automatically separates sheets up to B1 size whilst a blower bar provides a cushion of air to support the sheet as it is delivered into the jogger.



The standard jogger may be adjusted for height and to suit various sheet sizes.